


Tigemaster TM4

Machine for cutting winding stems and screwing in crowns

The Tigemaster 4 (or TM4) is a machine for assembling watch winding rods. It cuts the rods and then screws and glues the crowns.

Datasheet, 27.05.2023, V1.1

 Engineered and made in Switzerland

Machine functions

- Robust and reliable.
- Loading of crowns in hidden time.
- Calculation of total number of pieces and number of pieces per hour.
- Pneumatic opening of winding stem and crown clamps.
- Cutting speed adjustable from 10 to 200 %.
- Automatic wheel wear compensation.
- 2 work cycles: stepped or automatic.
- Highly flexible (with or without screwing, gluing, cutting, etc.).
- Dust suction system (very quiet).
- RS-232 output.
- Options :
 - Colmaster CM1 gluing device
 - Lasermaster LM1 control laser
 - CVLT



Technical specifications

Supply voltage :	110-230 V / 50-60 Hz
Power :	350 W
Maximum inlet pressure :	5 bar
Resolution :	± 0,01 mm
Languages	FR / GB / DE / IT
Weight :	34 kg
Dimensions (l/d/h) :	491 x 521 x 335 mm

Accessories :

See Tigemaster TM4 accessories sheet.

Stem clamps and crown clamps
Sold separately.

Available Options

Colmaster CM1 (Gluing device)

- Controlled by TIGEMASTER TM4
- Automatic glue level correction
- Glue laying pressure and time adjustable
- Long-lasting anti-drying system




Weight : 3 kg
Dimensions (l/d/h) : 240 x 150 x 250 mm

Lasermaster LM1 (Laser detection device)

- Crown front face detection
- Avoids the need for systematic checks

Weight : 0,253 kg
Dimensions (l/d/h) : 116 x 106 x 281 mm

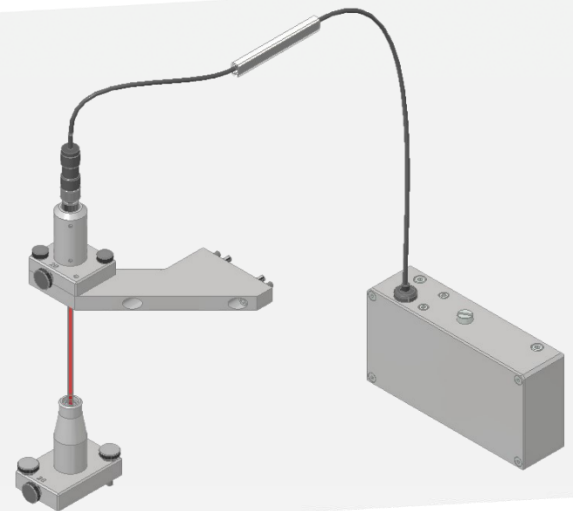

CVLT

- Digital comparator to display the length of the rod and facilitate adjustment

